
C Series Double Channel

TC & RTD Isolated Safety Barrier

Nanjing New Power Electric Technology Co., Ltd.

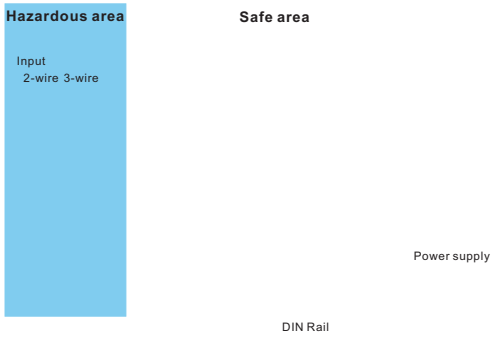

Website: http://www.anpe.cn
Service Tel: +86(25)-84459479
Address: No. 9, Jinxin Middle Road, Jiangning District, Nanjing (Jiangning Development Zone), China
Postcode: 2 00

(waterproofing, small foreign objects). It is suitable for installation in the control room or high density field cabinet, DIN 35 mm installation is convenient for installation and displacement.

- The devices were designed for use in pollution degree 2 and overvoltage category III as per IEC/EN 60664- . If used in areas with higher pollution degree, the devices need to be protected accordingly.
- Installation position shall not be affected by strong mechanical vibration; impact and electromagnetic induction from signal terminal and power supply, should conformity with the requirements on electromagnetic interference resistance of products in Class 3 industrial field atmosphere stipulated in IEC 6 000-4; the atmosphere shall be free from gases that are corrosive to metal and plastic components.
- The apparatus may only be operated, maintained and decommissioned by competent according with the instruction manual, and it must the p